

SHIELD SOURCE INCORPORATED MODEL ESL SELF-LUMINOUS EXIT SIGN

Non-electric, maintenance free! Free energy for 10, 12, 15 or 20 years.

Shield Source self-luminous exit signs are the most reliable exit signs offered today. They require no external energy source, no electrical wiring or batteries and are always ready to provide effective and efficient maintenance free exit marking systems. Your first cost is your last cost! Rugged PVC and aluminum housing is practically indestructible. The slim profile compliments any decor. The sharp angled corners offer a crisp clean appearance for the life of the unit. When applications dictate long life, economy and corrosion resistance, the Shield Source Model ESL is the unit of choice. Its unique design combines impact resistance, non-glare faceplates and sealed construction, for the most durable and attractive exit sign in existence. Universal chevrons allow easy ordering and application. Suitable for use in most floor proximity applications.



STANDARD FEATURES

- No electricity, no batteries.
- Explosion Proof, weatherproof.
- No maintenance!
- Easy to install. No Wires!
- Lights guaranteed for up to 20 years.
- Letter-shaped tubes for best light in the industry.
- Extremely durable housing with acrylic face.
- Low cost unit.
- Suitable for Floor Proximity mounting.

WARRANTY

All Shield Source Self-Luminous exit signs are warranted against defects in material and workmanship for the life of the unit when properly installed. Light output is guaranteed to meet the current NFPA minimum standards at the end of the life of the signs, your choice of 10, 12, 15 or 20 years.


CONFORMANCE TO CODES AND STANDARDS

UL listed, NFPA Life Safety Code, Licensed by the NRC and CNSC. Conforms to ANSI N540.

SPECIFICATIONS

Shield Source Self-Luminous exit sign model ESL is designed as a slim line easy install aluminum/plastic sign. Dimensions for a single face sign are 12 5/8" wide x 8 3/16" high x 1 1/16" depth. EXIT letters shall be white, 6" height with a 3/4" stroke. The housing shall be constructed out of an aluminum backplate with an ABS plastic frame in the color of black or white. Face colors are offered in matte red, green or black with universal chevrons. The entire unit shall be sealed at the factory to prevent tampering. Universal mounting brackets shall be standard and packaged with each unit. Brightness of the sign shall not decay below 0.06 foot lamberts for the rated life of the unit.

STANDARD MOUNTING OPTIONS

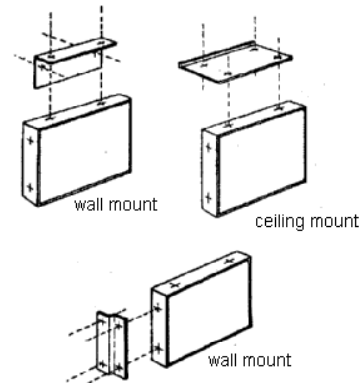

To order this sign:

ESLYYSPLF# EXIT SIGN eg ESL201PRW1

YY – YEAR 10, 12, 15 OR 20

S – SIDES 1 – SINGLE FACE, 2 – DOUBLE FACE

L – LEGEND COLOR R – RED, G – GREEN OR B – BLACK

F – FRAME COLOR W – WHITE, B – BLACK

- HARDWARE


1 – STANDARD MOUNT

2 – CANOPY MOUNT


3 – PENDANT MOUNT

Options (extra charge)


CANOPY MOUNT




PENDANT MOUNT



SECURITY MOUNT



INSTITUTIONAL FRAME

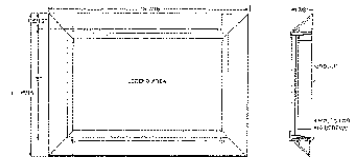

SHIELD SOURCE INCORPORATED

R.R.#5, MUNICIPAL AIRPORT

PETERBOROUGH, ON K9J 6X6

(800) 664-1405 (705) 743-6146

FAX (705) 743-2942

SALES@SHIELDSOURCE.COM