

SHIELD SOURCE INCORPORATED MODEL RESL SELF-LUMINOUS EXIT SIGN

Non-electric, maintenance free! Free energy for 10, 12, 15 or 20 years.

Shield Source self-luminous exit signs are the most reliable exit signs offered today. They require no external energy source, no electrical wiring or batteries and are always ready to provide effective and efficient maintenance free exit marking systems. Your first cost is your last cost! Model RESL is a recessed wall mount unit with a fine-looking aluminum frame. Architecturally, it is the most unobtrusive exit sign installation, while meeting all UL and NFPA requirements. Its unique design combines impact resistance, non-glare faceplates and sealed construction, for the most durable and attractive exit sign in existence. Universal chevrons allow easy ordering and application.

STANDARD FEATURES

- *No electricity, no batteries.*
- Explosion Proof, weatherproof.
- *No maintenance!*
- Easy to install. No Wires!
- Lights guaranteed for up to 20 years.
- Letter-shaped tubes for best light in the industry.
- Extremely durable housing with acrylic face.
- Suitable for all Exit signs applications including Floor Proximity mounting.

WARRANTY

All Shield Source Self-Luminous exit signs are warranted against defects in material and workmanship for the life of the unit when properly installed. Light output is guaranteed to meet the current NFPA minimum standards at the end of the life of the signs, your choice of 10, 12, 15 or 20 years.

CONFORMANCE TO CODES AND STANDARDS

UL listed, NFPA Life Safety Code, Licensed by the NRC and CNSC. Conforms to ANSI N540.


SPECIFICATIONS

Shield Source Self-Luminous exit sign model RESL is designed as a floor proximity sign. Dimensions for a single face sign is 14.875 x 10.375 x 1.375" (outer) and a dimension of 12.5625 x 8.25 x 1.375 (inner wall dimension). EXIT letters shall be white, 6" height with a 3/4" stroke. Face colors are offered in matte red, green or black with universal chevrons. The entire unit shall be sealed at the factory to prevent tampering. Brightness of the sign shall not decay below 0.06 foot lamberts for the rated life of the unit. Aluminum backpans can be supplied to the job site for easy mounting prior to the signs arriving.

SHIELD SOURCE INCORPORATED
R.R.#5, MUNICIPAL AIRPORT
PETERBOROUGH, ON K9J 6X6
(800) 664-1405 (705) 743-6146
FAX (705) 743-2942
SALES@SHIELDSOURCE.COM



STANDARD MOUNT

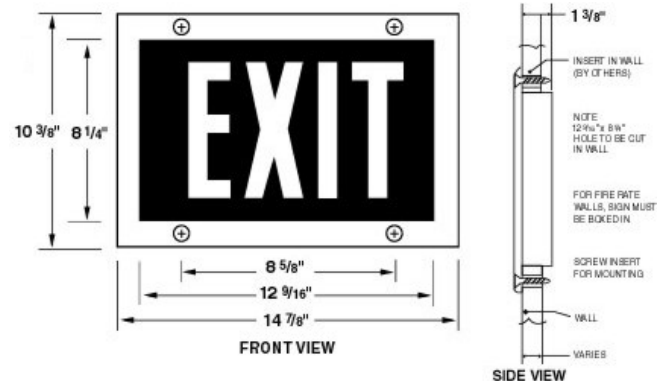

To order this sign:

RESL **YYSLF** EXIT SIGN eg RESL201RW

YY – YEAR 10, 12, 15 OR 20

S – SIDES 1 – SINGLE FACE

L – LEGEND COLOR R – RED, G – GREEN OR B – BLACK

F – FRAME COLOR W – WHITE, B-BLACK, BA-BRUSHED ALUMINUM